


Technical data sheet · LÜTZE SUPERFLEX[®] PLUS N (C) PUR 300 V

For highest requirements

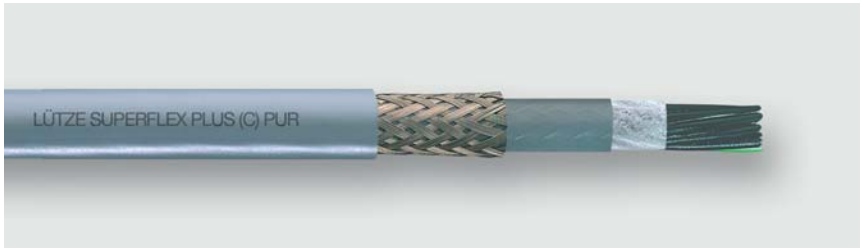

PUR control cables · C-track compatible · shielded

Identification	Type	SU+N(C)PUR(5G0,75)UL 300V
	Part-No.	113307

Use/Application/Properties

Application	<ul style="list-style-type: none">• Machine and device construction, transport and conveyor technology, HVAC technology• In areas with high concentrations of people or material assets, where corrosive gases need to be avoided in the event of fire• As a monitoring, measurement and control cable for industrial applications• Especially for rough environments• For installation in energy chains with constant linear movement• Anywhere where electrical interference fields can influence the signal transmission
-------------	--

19.03.2018 – Subject to technical modification

Part-No. 113307

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet - LÜTZE SUPERFLEX[®] PLUS N (C) PUR 300 V

For highest requirements

Properties	<ul style="list-style-type: none"> • Reduced friction due to high glide conductor insulation (HGI) for high mechanical loads • High active and passive interference resistance (EMC) • Braided shield optimised for continuous flexing applications • Low capacitance, very good electrical properties • Flame-retardant, self-extinguishing • Halogen-free, no corrosive gases • Very good alternating bending strength • Low adhesion, abrasion-resistant, nick-resistant, tear resistant • Hydrolysis-resistant, microbe-resistant, and rot-resistant • Weatherproof, ozone and UV resistant (normal lighting conditions) • Good ruggedness and salt water resistance • Excellent coolant and lubricant resistance • Resistant to most oils, greases, alcohol-free benzines and kerosene • Silicone free • RoHS-compliant
------------	---

Construction

Description	SUPERFLEX [®] PLUS N (C) PUR 300V
Number of conductors/cross-section	(5G0.75)
Jacket material	PUR
Jacket color	grey RAL 7001
Outer Ø	8.3 mm
Weight	9.7 kg/100 m
Cu-Index	5.3 kg/100 m

Element 1

Element construction	(5G0.75)
Conductor	CU-wire bare
Conductor category	IEC 60228, Class 6 Superfinely stranded DIN VDE 0295 class 6
Conductor marking	black with white number print green/yellow
Conductor insulation	Special TPE

overall construction

Overall stranding	conductors layered construction layer pitch optimised conductors twisted without mechanical stress
Overall wrapping	Non-woven material
Inner jacket	TPE

19.03.2018 – Subject to technical modification

Part-No. 113307

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet - LÜTZE SUPERFLEX[®] PLUS N (C) PUR 300 V

For highest requirements

Overall shield	Braid shield Tinned copper wires optical cover approx. 85%
Jacket characteristics	Flame-retardant self-extinguishing Oil resistant grease-resistant petrol-resistant (alcohol-free) kerosene-resistant Silicone-free Halogen free

Technical data

Rated voltage U_0/U	300/500 V
Rated voltage UL	300 V
Test voltage type	AC 3000 V
Temperature according to UL	80 °C
Temperature range moving	-25 °C ... +80 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	10×D
Minimum bending radius fixed	6×D

Element 1

Element construction	(5G0.75)
Insulation resistance at 20 °C	1000 MΩ×km
Operating capacitance wire-wire	75 pF/m
Operating capacitance wire-shield	108 pF/m

Approvals/Standards

Approvals	cURus
UL style	AWM 20233
Conformity	CE RoHS REACH
Burning behavior according to	IEC 60332-1-2 DIN EN 60332-1-2 VDE 0482 322-1-2 UL 1581 Part VW-1 Flame Test UL FT1
Halogen free according to	DIN EN 60754-1 IEC 60754-1
UV-resistant according to	DIN EN ISO 4892-2-A

19.03.2018 – Subject to technical modification

Part-No. 113307

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY


Technical data sheet - LÜTZE SUPERFLEX[®] PLUS N (C) PUR 300 V

For highest requirements

General

Note CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU

Logo

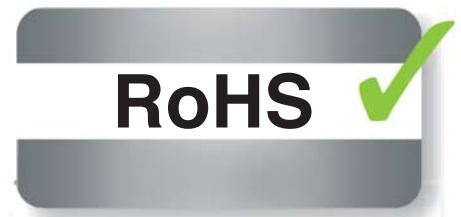

19.03.2018 – Subject to technical modification

Part-No. 113307

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk