

Rittal – The System.

Faster – better – everywhere.

Cable gland HD – HD 2410.110

Date : May 1, 2020

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Cable gland HD – HD 2410.110

created: 01.05.2020 build on www.rittal.com/uk-en

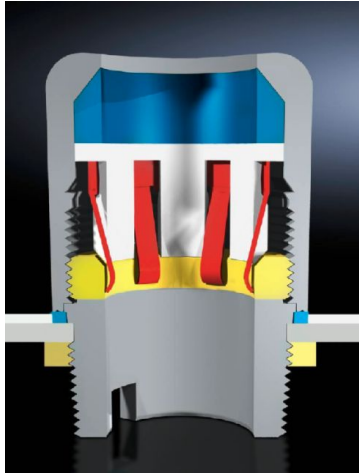

Discontinued article.

Product description

Design:	EMC
Benefits:	Smooth, solid exterior surfaces effectively prevent the depositing of harmful micro-organisms. Much easier, and therefore cheaper to clean compared with conventional cable glands.
Applications:	Manufacturer Clean room technology (e.g. pharmaceuticals) Biotechnology Chemical industry
Material:	Nut: Stainless steel 1.4305 (AISI 303) Seal: Conforms to FDA 21 CFR 177.2600

**Protection category
IP to IEC 60 529:** IP 68 (5 bar, 30 min)

**Protection category
IP to DIN 40 050-9:** IP 69K

Product features

**Ambient temperature
range:** -20 °C...+100 °C

Thread: M16 x 1.5

**Operating
temperature (max.):** 100 °C

Cable entry: For cable diameter: 5 mm - 10 mm

Packs of:	5 pc(s).
Weight/pack:	0.2 kg
EAN:	4028177552142
Customs tariff number:	73181900
ETIM 7.0:	EC000441
ETIM 6.0:	EC000441
eCl@ss 8.0/8.1:	27149109
eCl@ss 6.0/6.1:	27189265
Product description:	HD Cable gland, stainless steel 1.4305, size: M16x1,5, for cables Ø 5-10 mm, EMC version
Approvals	
Certificates:	EAC
Declarations:	Manufacturer's declaration