


WZAD 50N
WZAD 70N
WZAD 95N/120N

NEW

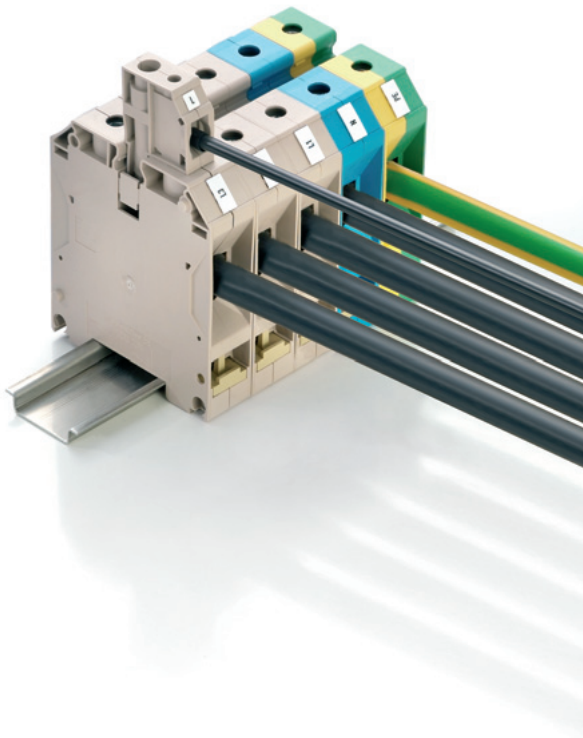

The WZAD additional connection for cross sections of 50, 70 and 95/120 mm² is designed as an additional connection for small currents, such as socket outlets and monitoring modules via the cross-connection channel. This solution allows you to install an additional connection without having to open the already connected terminal point.

- Additional connection for the WDU 50N, 70N and 95N/120N
- The maximum degree of safety with Wemid insulating material
- Marking options with standard markers
- Smaller supply or Monitoring connection without disrupting the already connected power termination
- WQV cross connection option is still possible
- Up to 2 wires of the same size can be connected to the WZAD

United Kingdom

Weidmüller Ltd.
1 Abbey Wood Road
Kings Hill
West Malling
Kent ME19 4YT
Phone +44 1732 877000
Fax +44 1732 873873
info@weidmuller.co.uk
www.weidmueller.com

USA

W-Interconnections, Inc.
821 Southlake Boulevard,
Richmond, VA 23236
Phone +1 804 7942877
Fax +1 804 3792593
info@weidmuller.com
www.weidmuller.com

Other countries

Weidmüller Interface GmbH & Co. KG
P.O. Box 3030
32720 Detmold
Phone +49 5231 14-0
Fax +49 5231 14-20 83
info@weidmueller.com
www.weidmueller.com

Additional connection

WZAD

6 mm²



width x length x height with TS 35 x 7.5 mm
 max. current / max. cond. cross-section A/mm²
 max. clamping range mm²

12.5 x 30.5 x 60.5
41 / 6
0.5...10

Technical data

Rated data

Rated voltage V
 Rated current A
 Rated cross-section mm²
 Rated impulse withstand voltage / Pollution severity kV/-
 Gauge to IEC 60947-1 / UL94 Flammability class

IEC 60947-7-1

IEC

800
 41
 6 / 26...8
 8 / 3
 A5 / V-0

Clamped conductors (H05V/H07V)

Solid / stranded mm²
 Flexible / Flexible with wire end ferrule mm²
 Tightening torque range (clamping screw) Nm
 Tightening torque range (Fixing screw) Nm
 Stripping length / Blade size clamping yoke connection mm / -
 Blade size fixing screw mm / -

Rated connection

0.5 ... 10 / 0.5 ... 10
 0.5 ... 10 / 0.5 ... 6
 1.0 Nm
 3.0 Nm
 12 / 0.8 x 4 mm
 Hexagon socket 4 mm

further connection

2 clamped cables with same cross-section (H05V/H07V)
 Solid / stranded mm²
 Flexible / Flexible with wire end ferrule mm²

0.5 ... 2.5 / 0.5 ... 2.5
 0.5 ... 2.5 / 0.5 ... 2.5

Note

Ordering data

Version

dark beige Wemid
 dark beige Wemid
 dark beige Wemid

Type

Type	Qty.	Order No.
WZAD 50N	5	1872720000
WZAD 70N	5	1964830000
WZAD 95N/120N	5	1859580000

Note

Accessories

Spacer for usage with WQV

dark beige Wemid
 dark beige Wemid
 dark beige Wemid

Type

Type	Qty.	Order No.
DIHUE WZAD 50N/WQV	5	1967090000
DIHUE WZAD 70N/WQV	5	1967110000
DIHUE WZAD 95N/120N/WQV	5	1967100000

Marking systems

(see large assortment in catalogue 7)

Marking tags

WS 10/6
 DEK 5/6